

# Crowd

## Quick Start

### Enable generation of user tokens

Crowd

Applications

Users

Groups

Directories

Audit log

Search applications

Add application

crowd

Details

Directories & groups

Administrators

Users

Permissions

Remote addresses

Authentication test

Options

☐ Lower case output

Convert all users and groups to lower case when passing the data to the application. This can be used to achieve case insensitivity for applications when the underlying directories contain mixed-cased data.

☐ Enable aliasing

With aliasing enabled, users can have a different username (alias) for the "crowd" application. This is useful if "crowd" does not support user renaming, but may impact the performance of incremental directory synchronization for this application. See the [documentation](#) for more information.

☒ Allow to generate user tokens

Allow this application to generate user tokens. For security reasons, it's recommended to disable this setting unless there are applications which require this setting to be enabled to work properly. To learn more, [see documentation](#)

☒ Authenticate with email address

Allow your users to authenticate with username or email address.

Save

Cancel

Powered by Atlassian Crowd Version: 5.0.2 (Build:#1790 - 2022-07-25) fe79e6bd-12bf-44c3-8cae-1c213648e183

Report a bug

Request a feature

About

Contact Atlassian

ATLASSIAN

### Create a user group "crowd-users"

Crowd

Applications

Users

Groups

Directories

Audit log

Search groups

Add group

Groups

Search

Directory

Status

Search

Reset

| Name                 | Description | Status |
|----------------------|-------------|--------|
| crowd-administrators |             | ACTIVE |
| crowd-users          |             | ACTIVE |

« Previous

Next »

Powered by Atlassian Crowd Version: 5.0.2 (Build:#1790 - 2022-07-25) fe79e6bd-12bf-44c3-8cae-1c213648e183

Report a bug


Request a feature

About


Contact Atlassian

ATLASSIAN

Add this user group to the "Crowd" application

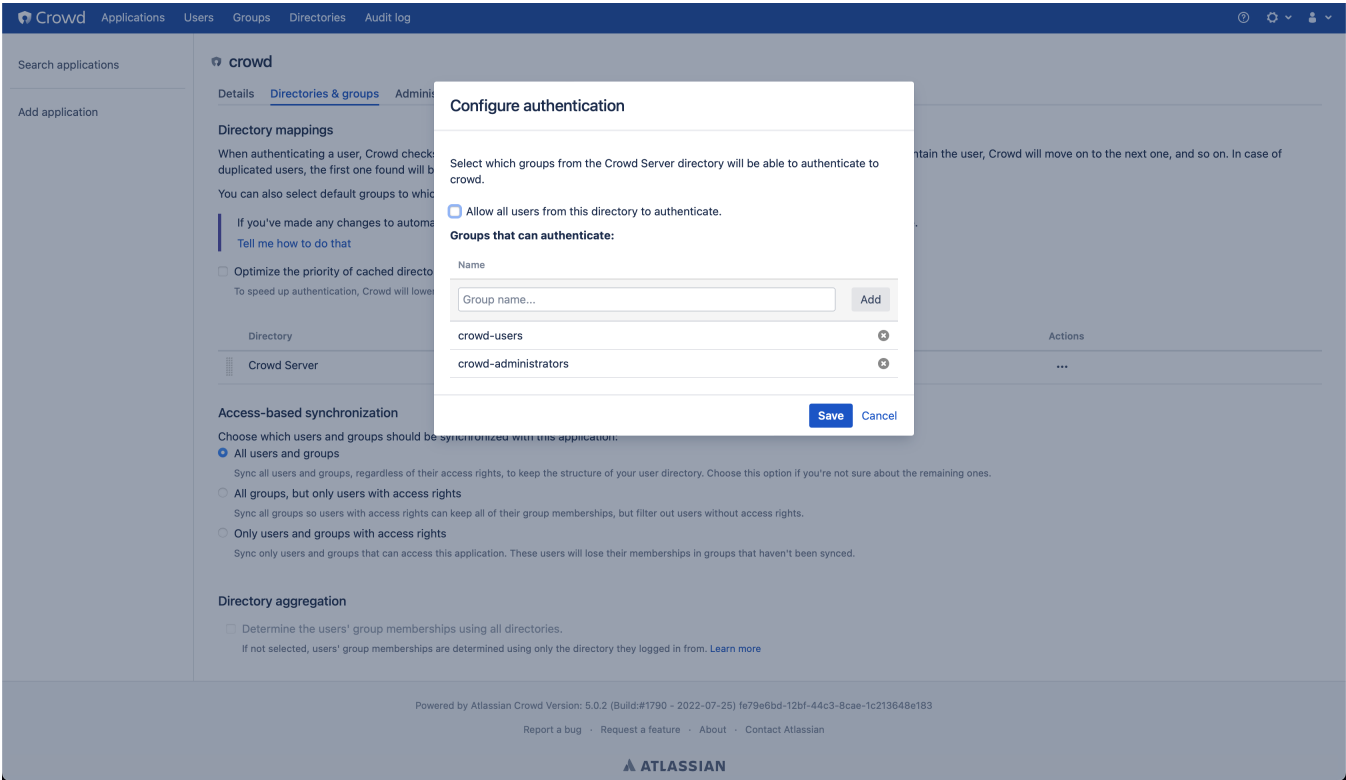

Add your IDP in the SAML configuration

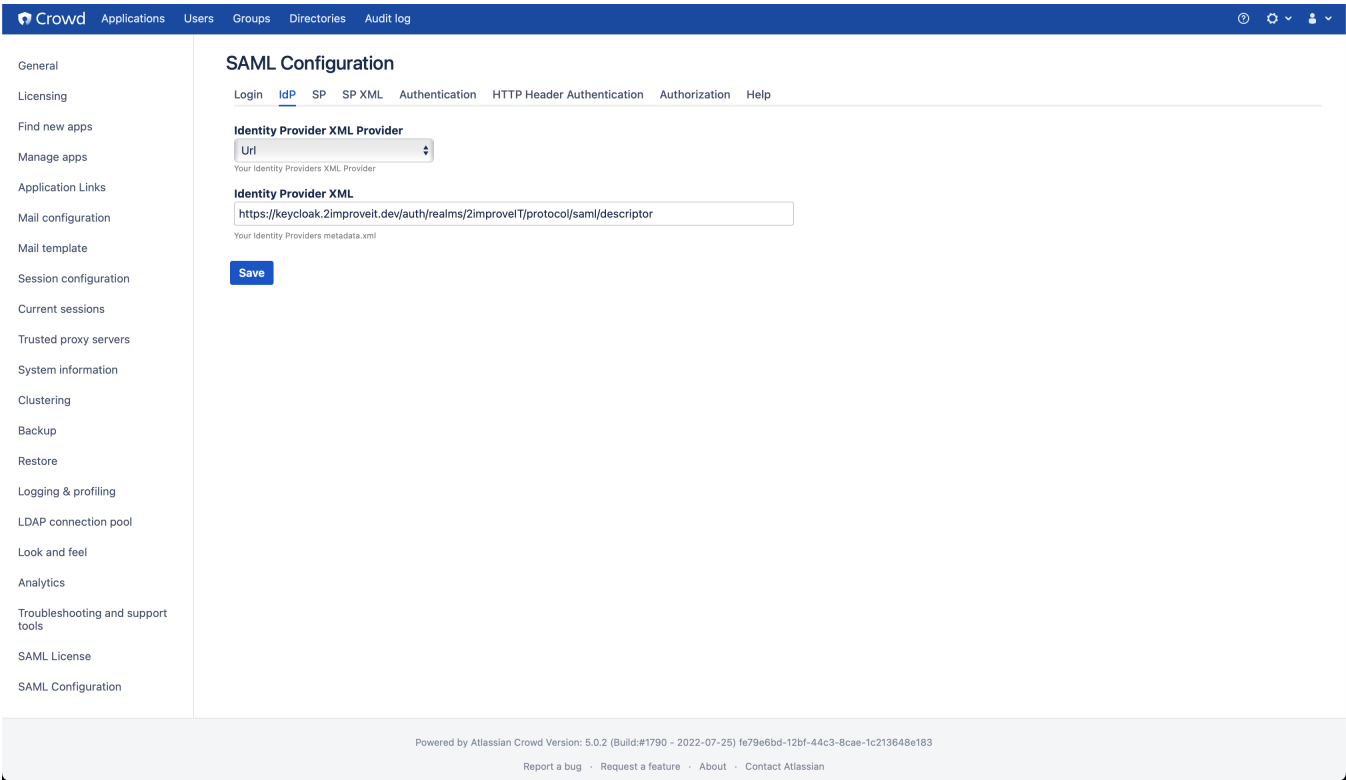

Configure the SAML Authentication

- Add "crowd-users" to the "Default usergroup(s)"
- Enable "Create user"

Crowd

ApplicationsUsersGroupsDirectoriesAudit log

General

Licensing

Find new apps

Manage apps

Application Links

Mail configuration

Mail template

Session configuration

Current sessions

Trusted proxy servers

System information

Clustering

Backup

Restore

Logging & profiling

LDAP connection pool

Look and feel

Analytics

Troubleshooting and support tools

SAML License

SAML Configuration

SAML Configuration

LoginIdPSPSP XMLAuthenticationHTTP Header AuthenticationAuthorizationHelp

SAML user name field

Named

SAML user name field on lookup and creation

Default usergroup(s)

crowd-users

Assign the user to these existing usergroups(s).

☒ Create user

Create user if not exists

SAML user display name field

SAML user display name Field on creation

SAML user email field

SAML user email field on creation

SAML user profile picture field

SAML user profile picture field to sync with

☐ Create usergroups

Create usergroups if not exists

☐ Add to usergroups

Add to usergroups on login

☐ Remove from usergroups

Remove from usergroups on login

SAML user groups field

SAML user groups field on creation or update

☐ Disable change password

Disable that a user can change his/her password

☐ Use email for lookup

Use the email instead of the username for identifying the user

Save, log out and test the SAML Sign On